


KM 7575-2 FL

Induction cooktop

Onset controls with 3 PowerFlex cooking zones for maximum versatility and performance.

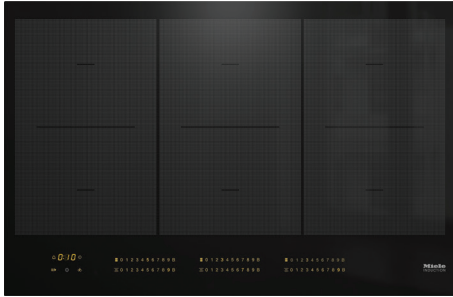


- Intuitive selection via numerical linear keybank - SmartSelect
- Attractive design - 800 mm wide with all-round frame
- Versatile and fast - 6 cooking zones including 3 PowerFlex areas
- Comm. with the rangehood - automatic function Con@ctivity 3.0
- Rapid heat-up times - TwinBooster

Heating type	
Heating type	Induction
Construction type	
Independent of oven	•
Design	
Elegant glass ceramic surface	•
Ceramic surface colour	Black
Print design	LightPrint
Frameless design	•
Zone details	
Number of zones	6
PowerFlex zones	
Number	6
Diameter in mm	150x230
Power rating in W	2100
Booster in W	3000
TwinBooster in W	3650
Zones	
Position	left centre
Type	PowerFlex bridge
Diameter in mm	230x390
Power rating in W	3150
Booster in W	3400
TwinBooster in W	3650
Position	centre
Type	PowerFlex bridge
Diameter in mm	230x390
Power rating in W	3400
Booster in W	4800
TwinBooster in W	7300
Position	right
Type	PowerFlex bridge
Diameter in mm	230x390
Power rating in W	3400
Booster in W	4800
TwinBooster in W	7300
User convenience	
Operation via touchpad controls	SmartSelect
Digital power level display	•
Pan/Pan-size sensors	•
Stop & Go function	•
Minute minder	•
Automatic switch-off for all zones	•
AutoBoost	•
Keeping warm	•
Appliance networking	
Automatic function Con@ctivity 3.0	Pre-equipped
Cleaning convenience	
Easy to clean ceramic surface	•

KM 7575-2 FL

Induction cooktop

Onset controls with 3 PowerFlex cooking zones for maximum versatility and performance.

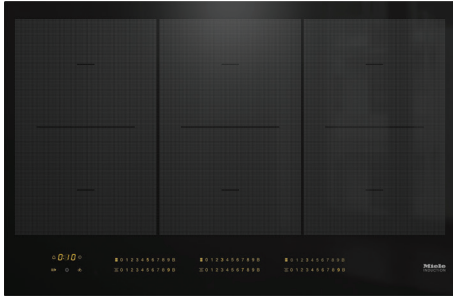



Safety	
Safety cut-out	•
Lock function	•
System lock	•
Fault monitoring	•
Integrated cooling fan	•
Overheating protection	•
Residual heat indicator	•
Technical data	
Dimensions in mm (width)	800
Dimensions in mm (depth)	520
Built-in height with mains connection box in mm	51
Cutout dimensions in mm (width)*	780
Cutout dimensions in mm (depth)*	500
Total connected load in kW	9.2
Weight in kg	15.7
Voltage in V	230
Frequency in Hz	50-60
Cable length in m	1.44
Standard accessories	
Connection cable	•

* Please refer to installation drawings for flush cutout dimensions

KM 7575-2 FL


Induction cooktop

Onset controls with 3 PowerFlex cooking zones for maximum versatility and performance.

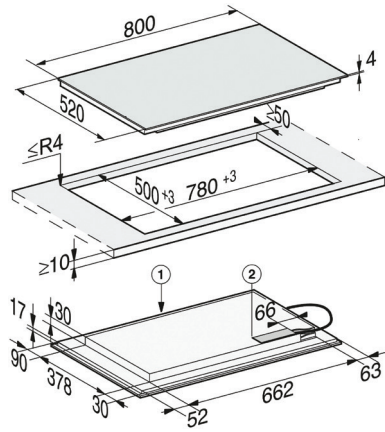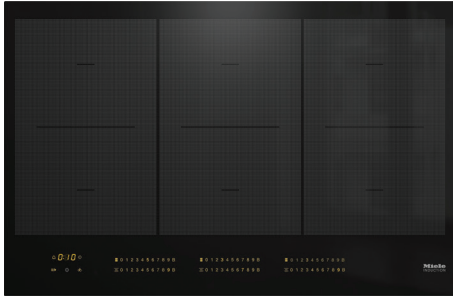

KM 7575-2 FL PowerFlex - (Installation drawing)

1. Front
2. Mains connection box, mains connection cable,
L = 1440 mm, supplied loose

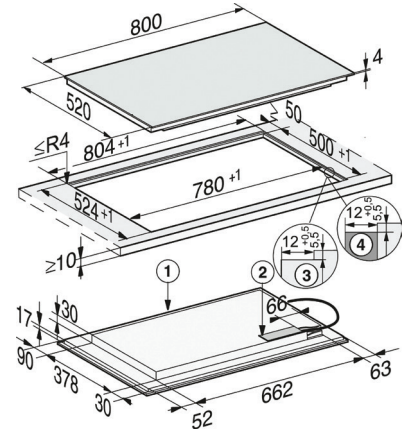

KM 7575-2 FL - (flush installation drawings)

1. Front
2. Mains connection box with mains connection cable,
L = 1440 mm,
3. Stepped cut-out natural stone worktop
4. Wood support 12 mm (not supplied)