

H 7840 BMX

Handleless speed oven

with a seamless design, Automatic programmes and food probe



- Large touch display with movement sensor – M Touch + MotionReact
- Easy cleaning – compartment with PerfectClean and linen structure
- Faster and more consistent results – Quick & Gentle
- Network-enabled WiFi appliance – Miele@home
- Get what you want in 1 easy step – Quick MW and Popcorn button

EAN: 4002516751762 / Material number: 12326410

Anniversary promotion	
Anniversary models 125	•
Construction type	
Appliance colour	Matte Black
Construction type and design	
Built-in speed oven	•
ArtLine	•
Handleless	•
Convenience features	
Quick & Gentle	•
Rapid Heat-up	•
Pre-heating	•
Food probe	With cable
Keeping warm	•
Crisp function	•
Operating modes	
Defrosting	•
Automatic programmes	•
Country-specific Automatic programmes	•
Auto Roast	•
Eco hot air	•
Grill	•
Fan Plus	•
Intensive Bake	•
Low temperature cooking	•
Microwave	•
Microwave with Auto Roast	•
Microwave + Grill	•
Microwave + Fan Plus	•
Microwave + Fan Grill	•
Conventional Heat	•
Bottom Heat	•
Fan Grill	•
Special applications	•
User convenience	
Networking with Miele@home	•
Display	M Touch
MotionReact proximity sensor	•
MotionReact: light comes on when movement is detected	•
MotionReact: display comes on when movement is detected	•
MotionReact: audible signal is acknowledged when movement is detected	•
MotionReact: detection of cabinet fronts	•
SoftOpen	•
MultiLingua	•
MyMiele	•
Help function	•
Popcorn function	•
Polyphonic buzzers	•

H 7840 BMX

Handleless speed oven

with a seamless design, Automatic programmes and food probe



EAN: 4002516751762 / Material number: 12326410

Time of day display	•
Clock synchronisation	•
Date display	•
Minute minder	•
Programmable start of cooking duration	•
Programmable end of cooking duration	•
Programmable cooking duration	•
Actual temperature display	•
Target temperature display	•
Buzzer when desired temperature is reached	•
Recommended temperature	•
Suggestion microwave power	•
Quick microwave	•
User programmes	•
Sabbath programme	•
Individual settings	•
Efficiency and sustainability	
Automatic residual heat utilisation	•
Cleaning convenience	
Stainless steel oven interior with linen structure and PerfectClean	•
Hinged grill element	•
CleanGlass door	•
Safety	
Appliance cooling system and touch-cool front	•
Safety switch-off	•
System lock	•
Sensor lock	•
Technical data	
Oven interior volume in l	43
No. of shelf levels	3
Number of shelf levels oven compartment 1	3
Number of shelf levels oven compartment 2	3
Oven light	1 LED spot
Temperatures in °C	30–250
Temperatures min. in °C	30
Temperatures max. in °C	250
Electronically controlled microwave power	•
Microwave power levels in W	
Niche width min. in mm	560
Niche width max. in mm	568
Niche height min. in mm	450
Niche height max. in mm	452
Niche depth in mm	550
Appliance width in mm	595
Appliance height in mm	456
Appliance depth in mm	568
Weight in kg	38.0
Total rated load in kW	3.20
Voltage in V	220-240
Frequency in Hz	50

H 7840 BMX

Handleless speed oven

with a seamless design, Automatic programmes and food probe



EAN: 4002516751762 / Material number: 12326410

Fuse rating in A	16
Number of phases	1
Mains cable with plug	•
Length of supply lead in m	2.00

Accessories supplied


Baking and roasting rack with PerfectClean	1
Wired food probe	1
Glass tray	2

Available display languages


Available display languages via MultiLingua

bahasa malaysia, dansk,
deutsch, english, español,
français, hrvatski, italiano,
magyar, nederlands,
norsk, polski, português,
русский, română,
slovenčina, slovenščina,
srpski, suomi, svenska,
türkçe, українська, čeština,
ελληνικά,


H 7840 BMX Installation diagrams

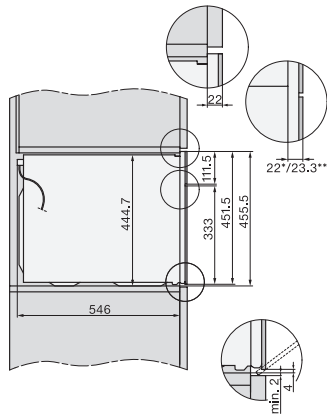

side view H7000 BM, installation drawings, GB, AUS
22 mm – glass, 23.3 mm – metal

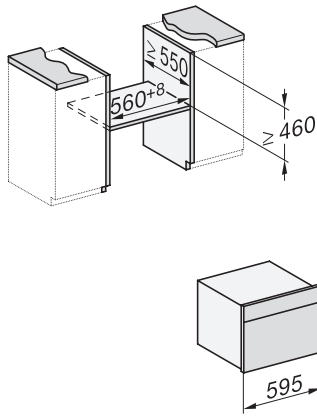


built-in H7000 BM build-under, installation drawings
If the oven is to be installed under a hob, follow the instructions for installing the hob and the height of the hob.

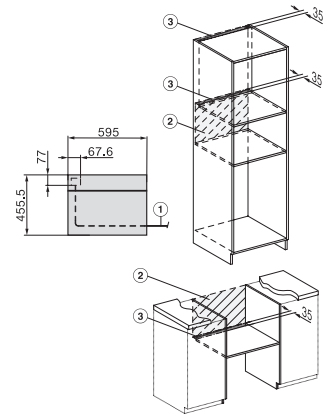


H7x40BM/BMX, installation drawings, GB, AUS

1) Mains connection cable, L=2000 mm, 2) No connection in this area, 3) Lüftungsausschnitt min. 150 cm²

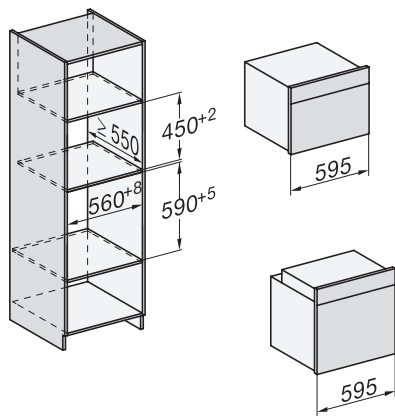


H226x-1B/BP/E/IP, H2760B/BP, H28x0B/BP,
H7x40BM/BMX, H7x6x0B/BP/BPX, installation drawings

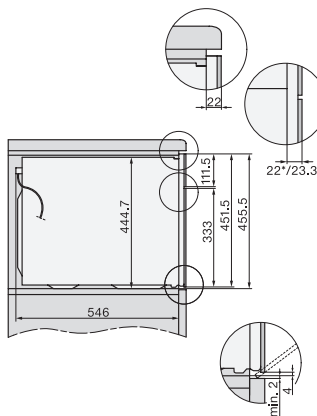


side view H7000 BM build-under, installation drawing,
GB, AU

22 mm – glass, 23.3 mm – metal

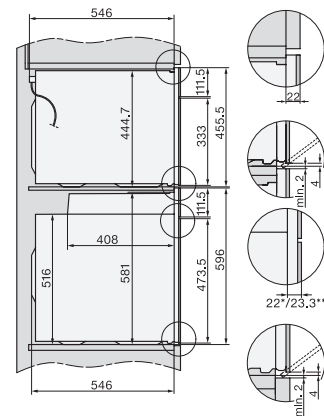

H2xxx-1 B/BP/E/IP, H7xxx B/BP/BM/BMX, installation
drawings

22 mm – glass, 23.3 mm – metal

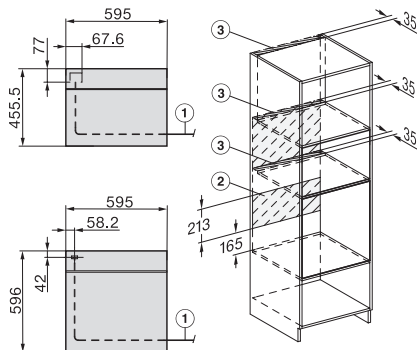

H2xxx-1 B/BP/E/IP, H7xxx B/BP/BM/BMX, installation
drawings

22 mm – glass, 23.3 mm – metal