

## H 2457 B Active

Built-in Oven with a modern design at a great entry level price



- Rotary selector controls - can be turned clockwise or anti-clockwise to select functions
- Particularly easy to clean – PerfectClean finish
- Cook your meals evenly on multiple shelf levels - wide 76l capacity with 5 shelf levels
- Easy handling – FlexiClip telescopic runners help the tray slide out easily and safely
- Protects against burns – touch-cool front door

EAN: 4002516737858 / Material number: 12422640

<b>Model and design</b>	
Built-in Oven	•
Appliance Colour	Obsidian black
Retractable rotary controls	•
<b>Convenience features</b>	
Rapid heat-up	•
<b>Operating modes</b>	
Defrost	•
Eco Fan Heat	•
Booster	•
Fan Plus	•
Intensive Bake	•
Conventional Heat	•
Bottom Heat	•
Fan Grill	•
Full Grill	•
<b>User convenience</b>	
Display	EasyControl
Time of day display	•
Minute minder	•
Programmable end of cooking duration	•
Programmable cooking duration	•
Actual temperature display	•
Target temperature display	•
Audible signal when desired temperature is reached	•
Recommended temperature	•
Individual settings	•
<b>Cleaning and care</b>	
CleanGlass door	•
<b>Safety</b>	
Appliance cooling system and touch-cool front	•
Safety switch-off	•
System lock	•
<b>Technical data</b>	
Oven compartment volume in l	76
No. of shelf levels	5
No. of shelf levels oven compartment 1	5
No. of shelf levels oven compartment 2	5
Numbered shelf levels	•
Oven light	1 halogen spot
Temperature regulation in °C	30-280
Temperature min. in °C	30
Temperature max. in °C	280
Niche width min. in mm	560
Niche width max. in mm	568
Niche height min. in mm	590
Niche height max. in mm	595
Niche depth in mm	550
Appliance width in mm	595

## H 2457 B Active

Built-in Oven with a modern design at a great entry level price






EAN: 4002516737858 / Material number: 12422640

Appliance height in mm	596
Appliance depth in mm	596
Weight in kg	42
Total rated load in kW	3.60
Voltage in V	230
Frequency in Hz	50
Fuse rating in A	16
Length of supply lead in mm	1.50
<b>Accessories supplied</b>	
Baking tray with PerfectClean HBB 71	1
Universal tray with PerfectClean HUBB 71	1
Baking and roasting rack without PerfectClean	2
FlexiClip telescopic runners HFC 70-C (pair)	1
Removable shelf runners (pair)	1

## H 2457 B Active Installation diagrams

### Installation in a tall or base unit

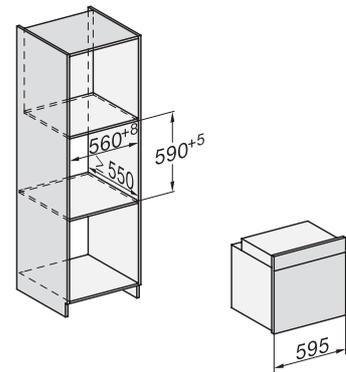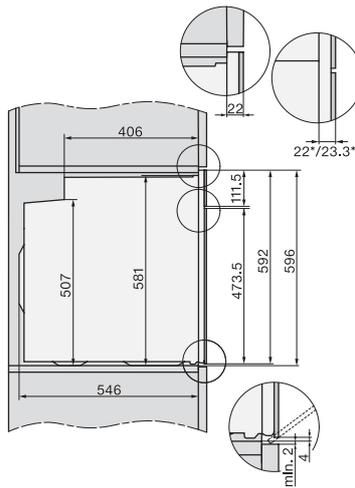
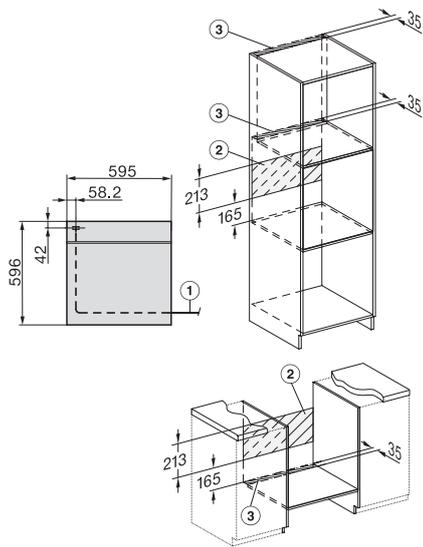


#### Key:

- 1) Mains connection length  $L=1500$  mm
- 2) No connections permitted in this area
- 3) Ventilation cut out, min  $150$  cm<sup>2</sup>

Side view H 7000 XL.  
22 mm – glass, 23.3 mm – metal.

Built-in H7000 XL.

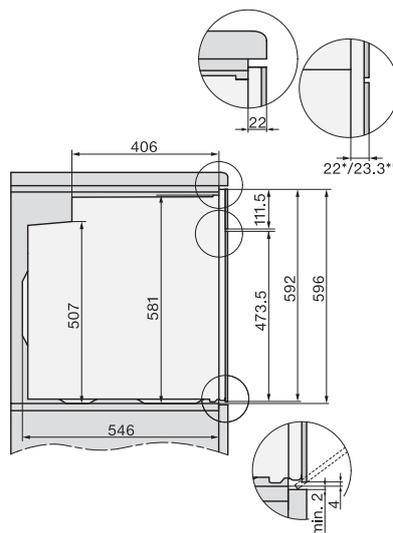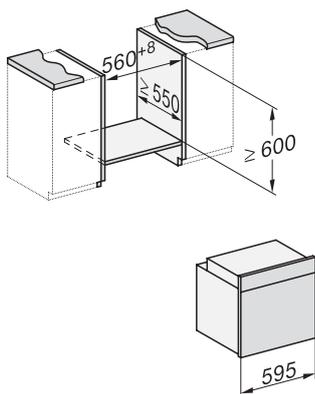

Installation H 7000 XL underframe.  
If the oven is to be installed under a cooktop, follow the instructions for installing the cooktop and the height of the cooktop.

Side view H 7000 XL build-under.  
22 mm – glass, 23.3 mm – metal.

All dimensions are given in mm