

**Serie | 2, Canopy cooker hood, 53 cm,  
DLN54AA70A**



**The integrated rangehood: offers a sleek and seamless design in the kitchen with fully integrated installation.**

- **Extraction rate:** at 420 m<sup>3</sup>/h, it quickly ensures optimal kitchen air quality.
- **Especially quiet:** high performance at just 67 dB.
- **LED lighting:** for perfect, energy-efficient illumination of the cooktop.

**Technical Data**

Typology :	Traditional
Approval certificates :	Australia Standards
Length electrical supply cord (cm) :	150
Required niche size for installation (HxWxD) :	208mm x 493mm x 257mm
Minimum distance above an electric hob :	550
Minimum distance above a gas hob :	600
Net weight (kg) :	4.720
Type of control :	mechanical
Number of speed settings :	3
Maximum output air extraction (m <sup>3</sup> /h) :	420
Maximum output recirculating air (m <sup>3</sup> /h) :	410
Number of lights :	2
Noise level (dB) :	67
Diameter of air outlet (mm) :	120
Grease filter material :	Washable aluminium
EAN code :	4242005127139
Connection Rating (W) :	121
Current (A) :	KSA
Voltage (V) :	220-240
Frequency (Hz) :	50
Plug type :	AU plug
Installation typology :	Built-in

**Optional accessories**

DWZ0IN0T0 : Recirculating kit



## Serie | 2, Canopy cooker hood, 53 cm, DLN54AA70A

**The integrated rangehood: offers a sleek and seamless design in the kitchen with fully integrated installation.**

---

### **Design & Innovation**

- Sliding switch control controls for power and light

### **Power and Mode of Operation**

- 3 power settings
- Maximum extraction 420 m<sup>3</sup>/h
- Extraction rate in recirculation mode:  
Max. normal use: 410 m<sup>3</sup>/h
- Ducted and recirculated-air operation
- For recirculated extraction optional recirculation kit (accessory) needed
- Noise min./max. Normal Level: 55/67 dB  
Noise max. Intensive setting: NO\_FEATURE dB
- Noise level in recirculation mode:  
Max. normal use: 68 dB(A) re 1 pW (55 dB(A) re 20 µPa sound pressure)

### **Comfort & Convenience**


- Dishwasher safe metal grease filters
- 2 x 3W LED lights
- with one-way flap: prevents outside air from entering your kitchen

### **2 year warranty**


### **Technical Information**

- Appliance width: 534 mm
- Appliance dimensions (HxWxD): 208 x 534 x 300 mm
- Built-in dimensions (HxWxD): 208 x 493 x 257 mm
- Diameter pipe Ø 120 mm (Ø 120 mm enclosed)
- Electrical cable length 1.5 m
- Power rating: 121 W


## Serie | 2, Canopy cooker hood, 53 cm, DLN54AA70A

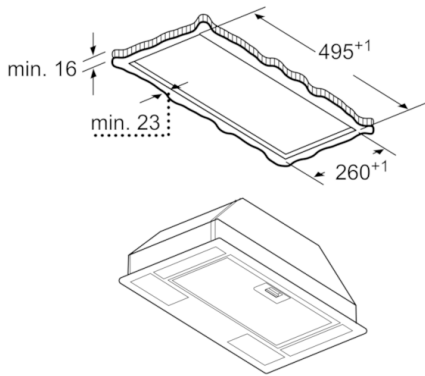


measurements in mm

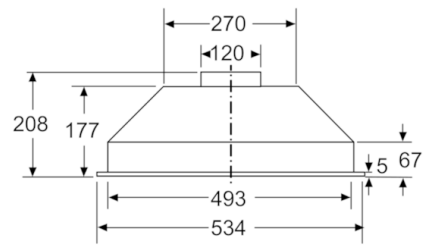

measurements in mm

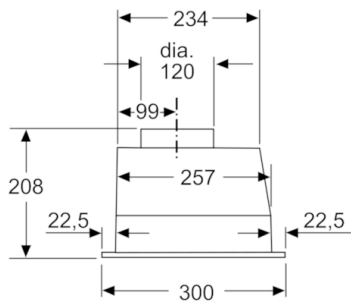

measurements in mm

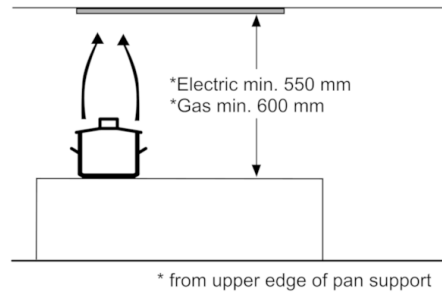

\* from upper edge of pan support

Use with gas hob:  
 Total maximum output: 9.75 kW  
 Maximum output of wok 4 kW.  
 Total maximum output of rear hobs: 5.25 kW

measurements in mm