

**iQ700, Built-in oven, 60 x 60 cm,
Black
HB974G2B1A**



The intelligent oven with Cooking Assistant for intuitive programme setting, activeClean for less effort in oven cleaning and roastingSensor for excellent results.

- ✓ activeClean® – The automatic, self-cleaning oven system for less efforts in oven cleaning.
- ✓ roastingSensor – Accurate, reliable thermometer for perfect roasts.
- ✓ fastPreheat – Heat the oven quickly. coolStart – Eliminate preheating for frozen foods.
- ✓ cookControl Pro – Excellent results, whatever the recipe or circumstances.
- ✓ Cooking Assistant – Intuitively set the right programme.

Color / Material Front: Black
 Built-in / Free-standing: Built-in
 Door opening: Drop down
 Cleaning : Pyrolytic+Hydrolytic
 Control Panel Material: Glass
 Door Material: Glass
 Dimensions (HxWxD): 595x594x548 mm
 Dimensions of the packed product: 670x670x680 mm
 Required niche size for installation (HxWxD): ..585-595 x 560-568 x 550 mm
 Cavity dimensions: 357 x 480 x 415 mm
 Usable volume of cavity: 71 l
 Net weight: 38.0 kg
 Gross weight: 40.6 kg
 EAN code: 4242003902042
 Power supply: 3600 W
 Fuse protection: 16 A
 Voltage: 220-240 V
 Frequency: 50; 60 Hz
 Length electrical supply cord: 120 cm

- HZ327000 Baking stone
- HZ629070 Air Fry & Grill tray
- HZ631070 Baking tray, enamelled
- HZ638070 Full ext rails, level independent, pyro



iQ700, Built-in oven, 60 x 60 cm, Black HB974G2B1A

Heating Functions

- Oven with 14 cooking functions: 3D hot air Plus, Top/ bottom heating, Hot air grilling, Full width grill, Half width grill, Pizza setting, coolStart (deep-frozen food special), Bottom heating, Low temperature cooking, Plate warming setting, Keep Warm, hotAir gentle, Conventional heat gentle, Air fry
- Temperature range 30 °C - 300 °C

Racks and Rails

- Number of shelf levels: 5
- Telescopic rails available as optional accessory, pyrolytic proof

Design

- studioLine Black Steel Design
- studioLine Glass handle
- TFT-Touchdisplay
- Touch control
- Cavity inner surface: enamel
- Cavity volume: 71 net usable litres

Cleaning

- activeClean® – automatic pyrolytic self-cleaning function with automatic safety door lock
- humidClean Plus program - easy cleaning of a lightly soiled cooking cavity

Convenience

- Temperature proposal, Residual heat indicator, Actual temperature display, Meat probe function
- roastingSensor (single pt. probe)
- cookControl Pro
- HomeConnect
- Cooking Assistant
- coolStart - eliminates preheating for frozen foods
- Automatic rapid heat up
- Oven door with SoftOpen and SoftClose door
- Integrated cooling fan
- Halogen lighting
- Electronic clock and timer

Accessories

- 1 x air fry & grill tray, 2 x combination grid, 1 x universal pan

Safety Features

- Automatic door lock during pyrolysis, Child lock, Automatic safety switch-off function, Residual heat indicator, Start button, Door contact switch
- Quadruple glazed door with heat reflective glass
- Low door temperature during pyrolytic cleaning
- Full glass inner door

Technical Information

- Length of mains cable: 120 cm
- Nominal voltage: 220 - 240 V


- Total connected load electric: 3.6 KW
- Energy efficiency rating (acc. EU Nr. 65/2014): A+(at a range of energy efficiency classes from A+++ to D)
- Energy consumption per cycle in conventional mode: 0.87 kWh
- Energy consumption per cycle in fan-forced convection mode: 0.69 kWh
- Number of cavities: 1
- Heat source: electrical
- Cavity volume: 71 net usable litres

Dimensions


- Appliance dimensions (HxWxD): 595 mm x 594 mm x 548 mm
- Installation dimensions (HxWxD): 585 mm - 595 mm x 560 mm - 568 mm x 550 mm
- Please reference the built-in dimensions provided in the installation drawing

iQ700, Built-in oven, 60 x 60 cm,
 Black
 HB974G2B1A

Installing two appliances on top of each other
 Air exchange

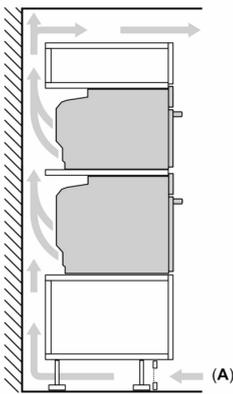


A: Air inlet $\geq 200 \text{ cm}^2$

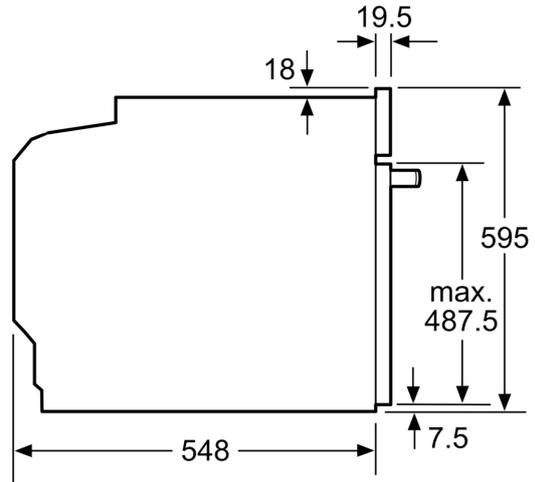

measurements in mm

If the appliance will be installed underneath a hob, the following worktop thicknesses (including substructure if necessary) must be taken into account.

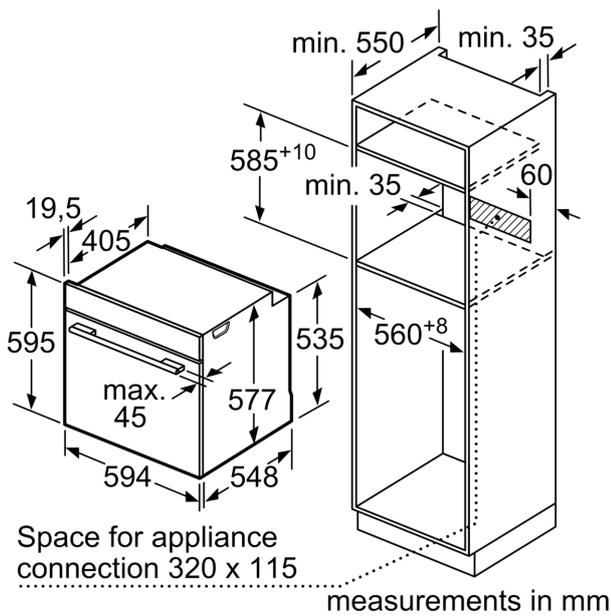

measurements in mm

Hob type	min. worktop thickness	
	fitted	flush
Induction hob	37 mm	38 mm
Full surface Induction hob	47 mm	48 mm
Gas hob	30 mm	38 mm
Electric hob	27 mm	30 mm

