

# KPFA12\*\*

## 120CM PORTOFINO WALLMOUNT RANGEHOOD

**MADE IN ITALY**  
Since 1948



**Dimensions** 1196mmW x 1227mmH x 495mmD

**Installation** Wallmount

**Motor** 275W

**Max Airflow** 777m<sup>3</sup>/hr (IEC 61591)

**Noise rating** 48–72 dBA (IEC 60704-3)

**Illumination** 4 x 4W LED

**Speeds** 4

**Supplied Accessories** 4 x stainless steel grease filters

**Optional Accessories** Charcoal filter part #FLT6

**Ducting Options** Duct to atmosphere / recirculate  
— 150mm diameter ducting required

**Power** 220–240V, 50Hz  
10A (3-pin plug)

**Warranty** Five years parts and labour

### Colours Available



Turquoise



Black



Stainless steel

### POWERFUL AIR EXTRACTION

Smeg's rangehoods have been developed to optimise performance for all cooking styles and kitchen designs. We recommend using 150 mm duct pipe for peak performance. In installations where ducting to the outside is not possible, a recirculation kit is available as an optional extra.

### LED LIGHTING

Four bright, long-lasting and energy efficient LED lights clearly illuminate the cooktop below, providing maximum visibility in the kitchen no matter what type of cooking you are doing.

### STAINLESS STEEL GREASE FILTERS

Smeg stainless steel honeycomb filters with stainless steel latch may be washed in the dishwasher for ultimate convenience. The 4 ply mesh effectively captures grease and grime whilst maintaining optimum airflow.

### 4 FAN SPEEDS

Engineered for premium performance, Smeg's Portofino rangehood features 3 speed settings along with an intensive function for maximum extraction, clearing the kitchen quickly of smoke and odours.



# KPFA12\*\*

## 120CM PORTOFINO WALLMOUNT RANGEHOOD


MADE IN ITALY  
Since 1948



**Dimensions** 1196mmW x 1227mmH x 495mmD

- Installation Wallmount
- Motor 275W
- Max Airflow 777m<sup>3</sup>/hr (IEC 61591)
- Noise rating 49-73 dBA (IEC 60704-2-13)
- Illumination 4 x 4W LED
- Speeds 4
- Supplied Accessories 4 x stainless steel grease filters
- Optional Accessories Charcoal filter part #FLT6
- Ducting Options Duct to atmosphere / recirculate  
— 150mm diameter ducting required
- Power 220-240V, 50Hz  
10A (3-pin plug)
- Warranty Five years parts and labour

	Extraction rate IEC 61591 [m <sup>3</sup> /h]	Noise level IEC 60704-2-13 [dB(A)]
Speed 1	287	49
Speed 2	389	58
Speed 3	606	67
Intensive speed	777	73

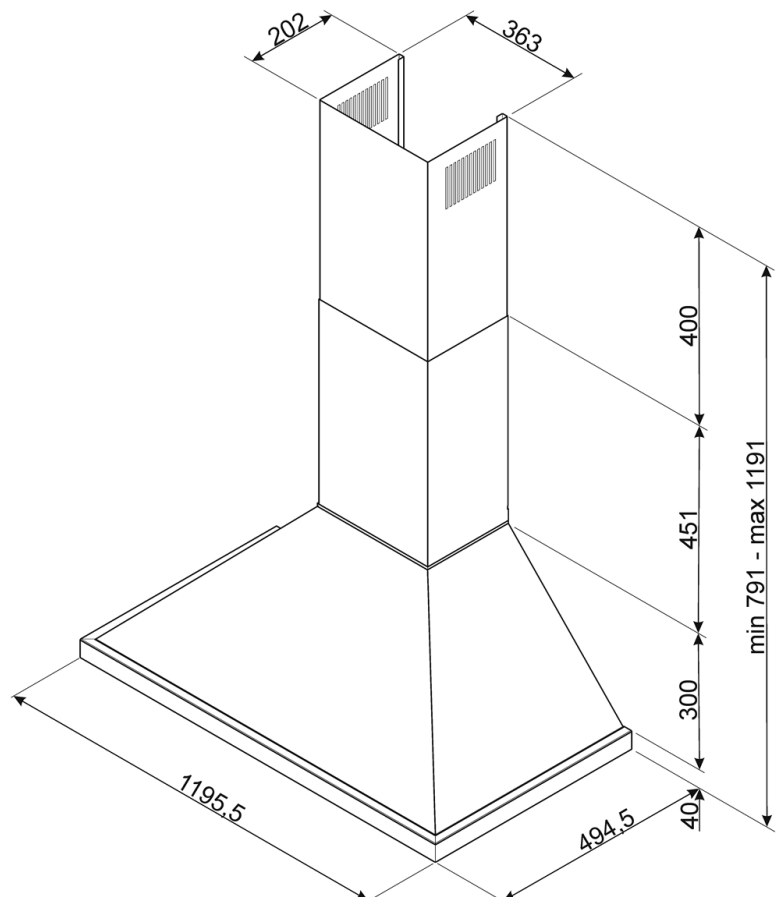

PLEASE NOTE: drawings are not to scale. They are to assist only.  
WARNING: technical specifications and product sizes can be varied by the manufacturer without notice.  
Cutouts for appliances should only be by physical product measurements. The above information is indicative only.