


**Series 6, Gas cooktop, 60 cm,  
Tempered Glass, Black  
PPH6A6B21A**

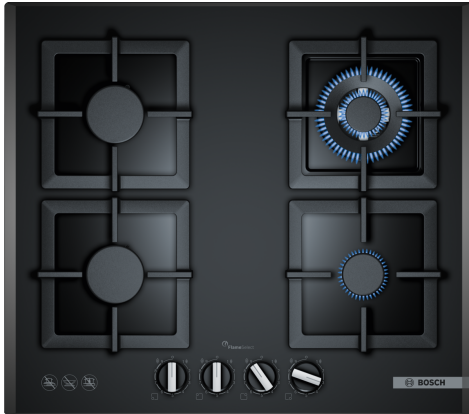

**The tempered-glass gas cooktop with  
FlameSelect: achieve perfect cooking  
results thanks to nine precisely defined  
power levels.**

- **FlameSelect:** adjust the gas flame precisely using nine defined levels.
- **Sword knobs:** for an ergonomic control.
- **Surface colour:** elegant black tempered-glass design.

Product name/family: .....gas hob w integrated controls  
 Built-in / Free-standing: ..... Built-in  
 Energy input: ..... Gas  
 Total number of positions that can be used at the same time: ..... 4  
 Type of control setting devices: .....Sword knobs  
 Min. required niche size for installation (HxWxD): .....45 x 560-562 x 480-492 mm  
 Width of the appliance: .....590 mm  
 Dimensions (HxWxD): ..... 58 x 590 x 520 mm  
 Dimensions of the packed product (HxWxD): ..... 141 x 651 x 578 mm  
 Net weight: .....15.1 kg  
 Gross weight: ..... 16.0 kg  
 Residual heat indicator: ..... without  
 Location of control panel: ..... Front  
 Basic surface material: ..... Tempered Glass  
 Color of surface: .....Black  
 Color of frame: ..... Black  
 Length electrical supply cord: ..... 100.0 cm  
 EAN code: .....4242005446827  
 Gas connection rating: ..... 8000 W  
 Fuse protection: .....3 A  
 Voltage: ..... 220-240 V  
 Frequency: ..... 50; 60 Hz



## **Series 6, Gas cooktop, 60 cm, Tempered Glass, Black PPH6A6B21A**

**The tempered-glass gas cooktop with  
FlameSelect: achieve perfect cooking  
results thanks to nine precisely defined  
power levels.**

---

### **Design**

- Black, Tempered Glass surface
- Single pan supports, cast iron

### **Usage convenience**

- FlameSelect (9 steps): precisely adjust the flame in nine defined and consistent levels.
- sword knobs: easily access knobs in front with strong grip for effortless turning.
- One-hand electronic ignition via controls: just push and turn the knob to ignite the flame.

### **Burners and power**

- 4 Gas burners
- Left front: Standard burner up to 6.5Mj/h (depending on gas type)
- Left rear: Standard burner up to 6.5 Mj/h (depending on gas type)
- Right rear: Wok burner up to 13.6 Mj/h (depending on gas type)
- Right front: Economy burner up to 3.8 Mj/h (depending on gas type)

### **Safety**

- Flame failure device fitted to each individual burner: prevents unwanted gas flow when flame goes out.

### **Installation (gas types & measurements)**

- Preset to natural gas (10mbar)
- Nozzle set for Liquid gas nozzles (28-30/37mbar) included.
- Dimensions of the product (HxWxD mm): 58 x 590 x 520
- Required niche size for installation (HxWxD mm) : 45 x 560 x (480 - 492)
- Min. worktop thickness: 30 mm
- Power cord 1 m with plug.

### **Accessories**

- 1 x Wok attachment ring, cross support for espresso, simmer plate included