

TR4110IP2

| | |
|--|---------------|
| Cooker size | 110x60 cm |
| N. of cavities with energy label | 2 |
| Cavity heat source | ELECTRICITY |
| Hob type | Induction |
| Type of main oven | Thermoseal |
| Type of second oven | Fan assisted |
| Cleaning system main oven | Vapour Clean |
| EAN code | 8017709312442 |
| Energy efficiency class | A |
| Energy efficiency class, second cavity | A |



Aesthetics

| | | | |
|----------------------|----------------------|---------------------|-------------------------|
| Aesthetic | Victoria | Colour of buttons | Black |
| Colour | Cream | No. of controls | 10 |
| Design | Victoria | Serigraphy colour | Black |
| Door | With frame | Handle | Smeg Victoria |
| Upstand | Yes | Handle Colour | Brushed stainless steel |
| Hob colour | Black enamel | Glass type | Black |
| Command panel finish | Enamelled metal | Plinth | Anthracite |
| Control knobs | Smeg Victoria | Storage compartment | Drawer |
| Controls colour | Stainless steel | Logo | assembled 50's |
| Display | electronic 5 buttons | Logo position | Upstand |

Programs / Functions

No. of cooking functions 5

Traditional cooking functions



Static



Fan assisted



Circulaire



Eco



Fan assisted bottom

Cleaning functions



Vapour Clean

Other functions



Defrost by time

Programs / Functions Auxiliary Oven

Cooking functions cavity 2 6

Traditional cooking functions, cavity 2



Static



Fan assisted



Eco



Large grill



Fan grill (large)



Fan-assisted bottom

Cleaning functions cavity 2



Vapour Clean

Programs / Functions Third Oven

No. of functions third oven 1

Oven light 

Full grill 

Hob technical features



Total no. of cook zones 5

Front left - Induction - single - 2.3 kW - Booster 3 kW - - Ø 21.0 cm

Rear left - Induction - single - 1.3 kW - Booster 1.4 kW - - Ø 18.0 cm

Central - Induction - single - 2.3 kW - Booster 3 kW - - Ø 27.0 cm

Rear right - Induction - single - 1.3 kW - Booster 1.4 kW - - Ø 18.0 cm

Front right - Induction - single - 2.3 kW - Booster 3 kW - - Ø 21.0 cm

Automatic switch off when overheat Yes

Minimum pan diameter indication Yes

Automatic pan detection Yes

Selected zone indicator Yes

Main Oven Technical Features



No. of lights 1

Fan number 1

Net volume of the cavity 61 l

Gross volume, 1st cavity 70 l

Cavity material Ever Clean enamel

No. of shelves 4

Type of shelves Metal racks

Light type Halogen

Removable inner door Yes

Total no. of door glasses 3

No. of thermo-reflective door glasses 1

Safety Thermostat Yes

Cooling system Tangential

Usable cavity space dimensions (HxWxD) 316x460x412 mm

Temperature control Electro-mechanical

| | | | |
|-----------------------|----------------|----------------------------------|----------|
| Light Power | 40 W | Lower heating element power | 1200 W |
| Cooking time setting | Start and Stop | Upper heating element - Power | 1000 W |
| Door opening | Side opening | Grill element | 1700 W |
| Side opening door | Yes | Large grill - Power | 2700 W |
| Removable door | Yes | Circular heating element - Power | 2700 W |
| Full glass inner door | Yes | Grill type | Electric |

Options Main Oven

| | | | |
|-------------------------------|-----|---------------------|--------|
| Timer | Yes | Minimum Temperature | 50 °C |
| End of cooking acoustic alarm | Yes | Maximum temperature | 260 °C |

Second Oven Technical Features



| | | | |
|---------------------------------|-------------------|--|--------------------|
| Fan number | 1 | Removable inner door | Yes |
| Net volume of the second cavity | 61 l | No. total door glasses | 3 |
| Gross volume, 2nd cavity | 70 l | No. thermo-reflective door glasses | 1 |
| Cavity material | Ever Clean enamel | Safety Thermostat | Yes |
| No. of shelves | 4 | Cooling system | Tangential |
| Type of shelves | Metal racks | Usable cavity space dimensions (HxWxD) | 316x444x425 mm |
| No. of lights | 1 | Temperature control | Electro-mechanical |
| Light type | Halogen | Lower heating element - power | 1200 W |
| Light Power | 40 W | Upper heating element - Power | 1000 W |
| Door opening | Side opening | Grill element - power | 1700 W |
| Side opening door | Yes | Large grill - Power | 2700 W |
| Removable door | Yes | Grill type | Electric |
| Full glass inner door | Yes | Tilting grill | Yes |

Options Auxiliary Oven

| | | | |
|---------------------|-------|---------------------|--------|
| Minimum Temperature | 50 °C | Maximum temperature | 260 °C |
|---------------------|-------|---------------------|--------|

Third Oven Technical Features



| | | | |
|--------------------------|-------------------|---------------------------------------|-----|
| Net volume, 3rd cavity | 36 l | Removable inner door | Yes |
| Gross volume, 3rd cavity | 41 l | No. total door glasses | 3 |
| Cavity material | Ever Clean enamel | No. of thermo-reflective door glasses | 1 |

| | | | |
|-----------------------|--------------|--|--------------------|
| No. of shelves | 2 | Safety Thermostat | Yes |
| Type of shelves | Metal racks | Cooling system | Tangential |
| No. of lights | 1 | Usable cavity space dimensions (HxWxD) | 169x440x443 mm |
| Light type | Incandescent | Temperature control | Electro-mechanical |
| Light Power | 25 W | Large grill - Power | 2700 W |
| Door opening | Flap down | Grill type | Electric |
| Removable door | Yes | Tilting grill | Yes |
| Full glass inner door | Yes | | |

Options Third Oven

| | | | |
|---------------------|-------|---------------------|--------|
| Minimum Temperature | 50 °C | Maximum temperature | 260 °C |
|---------------------|-------|---------------------|--------|

Accessories included for Main Oven & Hob



| | | | |
|------------------------------|---|--|---|
| Rack with back and side stop | 2 | Grill mesh | 1 |
| 40mm deep tray | 1 | Telescopic Guide rails, partial Extraction | 1 |

Accessories included for Secondary Oven




| | | | |
|------------------------------|---|--|---|
| Rack with back and side stop | 2 | Grill mesh | 1 |
| 40mm deep tray | 1 | Telescopic Guide rails, partial Extraction | 1 |

Accessories included for Third Oven

| | | | |
|------------------------------|---|----------------|---|
| Rack with back and side stop | 1 | 40mm deep tray | 1 |
|------------------------------|---|----------------|---|

Electrical Connection

| | | | |
|----------------------------------|-------------------|---------------------------|-----------------------------|
| Electrical connection rating | 16500 W | Power supply cable length | 150 cm |
| Current | 46 A | Type of electric cable | Yes, Double and Three Phase |
| Voltage | 220-240 V | Frequency | 50 Hz |
| Voltage 2 (V) | 380-415 V | Terminal block | 5 poles |
| Type of electric cable installed | Yes, Single phase | | |

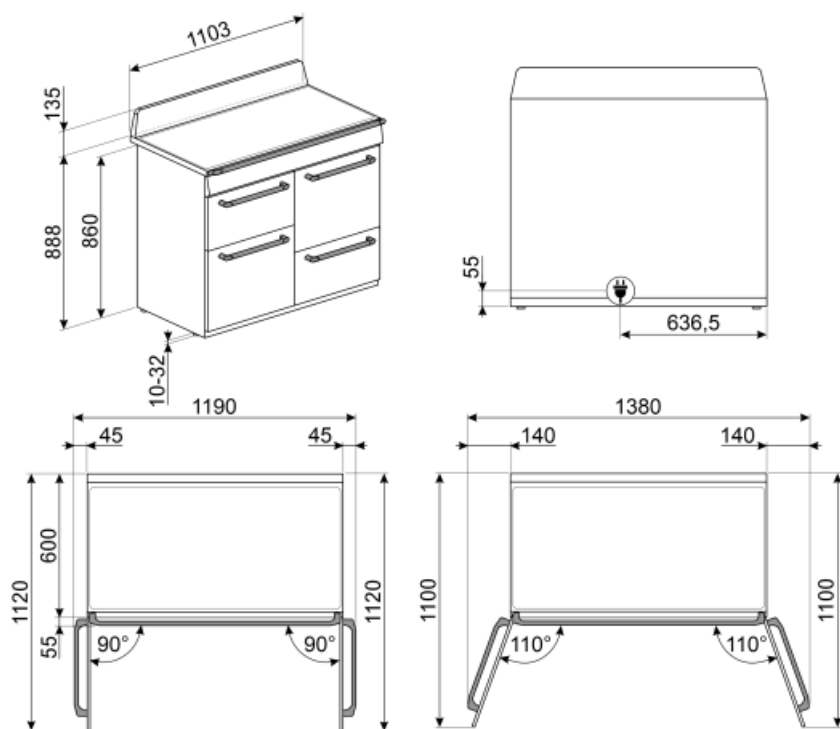

Not included accessories



KITH4110

Height extension kit (950 mm), suitable for TR4110 cookers



SFLK1

Child lock



PRTX

Refractory pizza stone with handles. D=35cm Not suitable for microwave ovens. Suitable for gas ovens, to be put on the griddle.



GRILLPLATE

Universal griddle for induction, gas, ceramic and electric hobs. Non-stick surface ideal for cooking meat, cheese and vegetables. Dimensions: 410 x 240 mm.



BN620-1

Enamelled tray, 20mm deep



SCRP

Induction and ceramic hobs and teppanyaki scraper



BBQ

Double sided plate BBQ. Suitable for recreating succulent and crispy dishes in the oven with the typical taste of grilled cooking. The ribbed side is particularly suitable for meats and cheeses. The smooth side for fish, seafood and vegetables.



PALPZ

Pizza shovel with fold away handle width: 315mm length : 325mm



AIRFRY

Air fryer rack AIRFRY . Ideal for recreating traditional frying in the oven, but with fewer calories and less fat. It allows you to cook quickly and simply dishes such as French fries, fried vegetables and fish, ensuring perfect browning and crispiness.



GTP

Partially extractable telescopic guides (1 level) Extraction: 300 mm Material: Stainless steel AISI 430 polished



BNP608T

Teflon-coated tray, 8mm depth, to be placed on the grid



KIT1TR41N

Splashback 110x75 cm suitable for TR4110 Victoria cookers, black



KITP65TR41

Depth extension kit (650 mm), suitable for TR4110 cookers



KIT600TR4110

Cover strip for hob back side, suitable for TR4110 Victoria cookers



TPKPLATE

Universal plate for induction, gas, ceramic and electric hobs. Non-stick surface ideal for cooking fish, eggs and vegetables. Dimensions: 410 X 240 mm.




GTT

Totally extractable telescopic guides (1 level) Extraction: 433 mm Material: Stainless steel AISI 430 polished



















**BN640**












Enamelled tray, 40mm deep

**SMOLD**

Set of 7 silicone moulds for ice creams, ice lollies, pralines, ice cubes or to portion food. Usable from -60°C to +230°C

Symbols glossary (TT)

| | |
|--|---|
|  <p>Child lock: some models are fitted with a device to lock the programme/cycle so it cannot be accidentally changed.</p> |  <p>Air cooling system: to ensure a safe surface temperatures.</p> |
|  <p>Defrost by time: with this function the time of thawing of foods are determined automatically.</p> |  <p>Triple glazed doors: Number of glazed doors.</p> |
|  <p>ECO-logic: option allows you to restrict the power limit of the appliance real energy saving.</p> |  <p>A: Product drying performance, measured from A+++ to D / G depending on the product family</p> |
|  <p>Enamel interior: The enamel interior of all Smeg ovens have a special antacid lining which helps keep the interior clean by reducing the amount of cooking grease adhering to it.</p> |  <p>Circogas: In gas ovens the fan distributes the heat quickly and evenly throughout the oven cavity, avoiding flavour transfer when cooking a number of different dishes at the same time. In electric ovens this combination completes cooking more quickly of foods that are ready on the surface, but that require more cooking inside, without further browning.</p> |
|  <p>Fan with upper and lower elements: The elements combined with the fan aim to provide more uniform heat, a similar method to conventional cooking, so pre-heat is required. Most suitable for items requiring slow cooking methods.</p> |  <p>Upper and lower element only: a traditional cooking method best suited for single items located in the centre of the oven. the top pf the oven will always be hottest. Ideal for roast, fruit cakes, bread etc.</p> |
|  <p>Circulaire: The combination of the fan and circular element around it gives a hot air cooking method. This provides many benefits including no preheat if cook time is more than 20 minutes, no flavour transfer when cooking different foods at the same time, less energy, and shorter cook times. Good for all types of food.</p> |  <p>ECO: The combination of the grill, fan and lower element is particularly suitable for cooking small quantities of food.</p> |
|  <p>Grill element: Using of grill gives excellent results when cooking meat of medium and small portions, especially when combined with a rotisserie (where possible). Also ideal for cooking sausages and bacon.</p> |  <p>Grill element: Using of grill gives excellent results when cooking meat of medium and small portions, especially when combined with a rotisserie (where possible). Also ideal for cooking sausages and bacon.</p> |
|  <p>Fan with grill element: The fan reduces the fierce heat from the grill, providing an excellent method of grilling various foods, chops, steaks, sausages etc. giving even browning and heat distribution, without drying out the food. The top two levels recommended for use, and the lower part of the oven can be used to keep items warm at the same time, an excellent facility when cooking a grilled breakfast. Half grill (centre portion only) is ideal for small quantities of food.</p> |  <p>Light</p> |
|  <p>Overheat protection: The safety system that automatically turns off the hob in case of overheating of the control unit.</p> |  <p>Induction: The work of these hobs is based on the principle of electromagnetic induction. The heat is generated directly in the bottom of the pan during its contact with the hob.</p> |

-
-  All glass inner door: All glass inner door, a single flat surface which is simple to keep clean.
 -  Side lights: Two opposing side lights increase visibility inside the oven.
 -  The oven cavity has 4 different cooking levels.
 -  Electronic control: Allows you to maintain temperature inside the oven with the precision 2-3 ° C. This enables to cook meals that are very sensitive to temperature changes, such as cakes, souffles, puddings.
 -  Vapour Clean: a simple cleaning function using steam to loosen deposits in the oven cavity.
 -  The capacity indicates the amount of usable space in the oven cavity in litres.
 -  The inner door glass: can be removed with a few quick movements for cleaning.
 -  The oven cavity has 2 different cooking levels.
 -  Telescopic rails: allow you to pull out the dish and check it without having to remove it from the oven entirely.
 -  Tilting grill: the tilting grill can be easily unhooked to move the heating element and clean the roof of the appliance in one simple step.
 -  The capacity indicates the amount of usable space in the oven cavity in litres.